


## INSTRUCTIONS FOR USE

# HIGH PRECISION BASE PLATE-TO-COUCH TOP FIXATION DEVICES: TABLE FIX

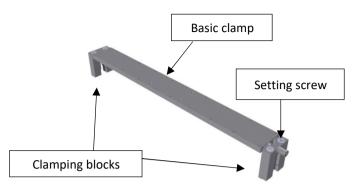

Article No. : 35744/6

#### A. GENERAL PRODUCT INFORMATION

This product is a fixation device to attach High Precision base plates to non-indexed couch tops.

### B. PRODUCT DESCRIPTION

Fixation system with clamping mechanism for use on non-indexed couch tops.

#### C. FIXATION TO BASE PLATES

Fixation to the 32150, 32201, 32204 and 32301 base plates




- Remove the clamping block on the side without the turning knob.
- Slide the Table fix device into the tunnel of the base plate until centred.
- Use the four M5 x 10 countersunk screws to fix the Table Fix to the base plate (use the 35744/12 M5 x25 in case this has to be done on a 32204 base plate).
- Refit the clamping block.
- Adjust the width of the Table Fix to the width of the couch by means of the setting screw.
- Be careful not to tighten too much to prevent damage to the internal mechanism.

Remarks:

- See next paragraph on how to mount and remove the clamping blocks.
- Use the four M5 x 20 with washers in case the Table Fix is mounted on a first-generation base plate with top fixation holes.


# Fixation to 32110, 32130, 32111, 32090, 32095, 35751N and 35754/6N base plates



- The above base plates are connected with the Table Fix by means of a 35747 Adapter Plate.
- Attach the Adapter Plate to the Table Fix with the four M5 x 10 screws.
- Attach the base plates to the Adapter Plate with the two M6 x 10 screws.

#### D. MOUNTING OF THE CLAMPING BLOCKS


Different clamping blocks (long, small, narrow, Lshape, etc.) can be mounted on the Table Fix device to allow the fixation of the base plates to any type of couch top. These clamping blocks can be mounted on the Table Fix with the two M6 countersunk screws. Use the appropriate Allan Wrench to fasten or release these screws.





## E. AVAILABLE TYPES OF CLAMPING BLOCKS

The following optional clamping blocks can be mounted to the Table Fix (see right).

(the top dimensions of the blocks are always 50 x 15 mm)

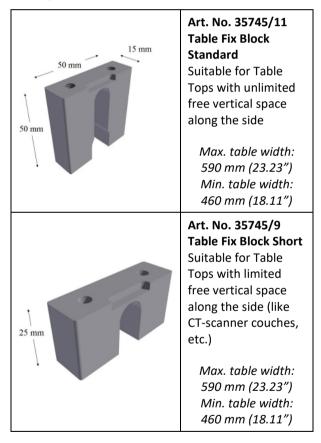

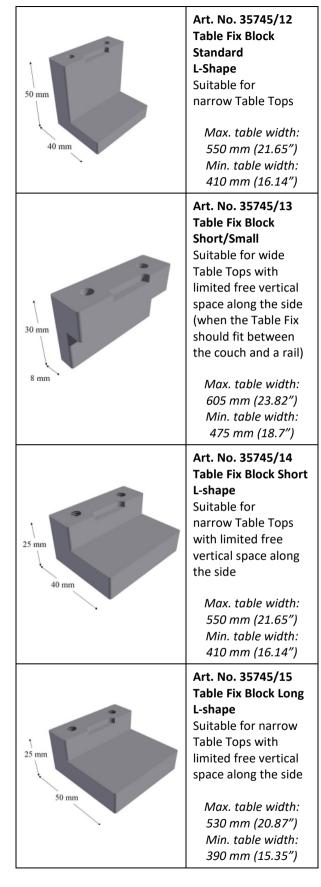

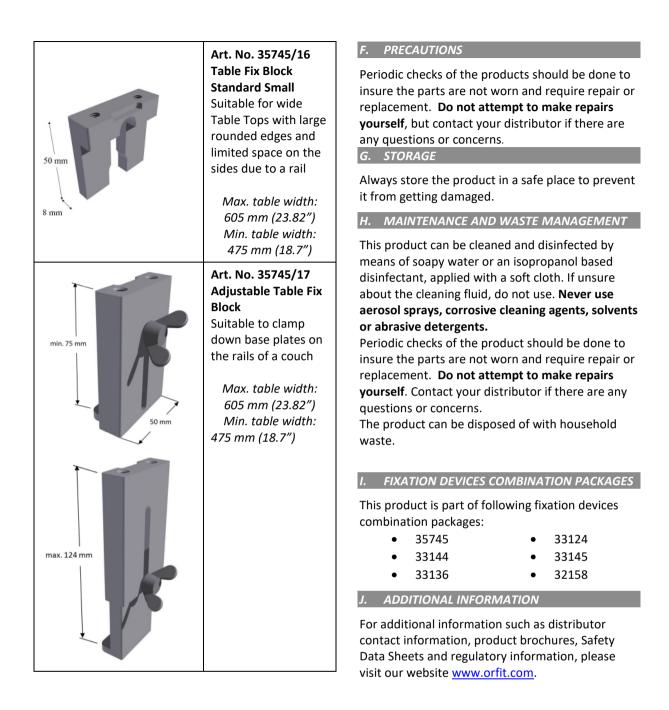

Note:

It is prohibited to make alterations to this text without prior approval from Orfit Industries.

**ORFIT INDUSTRIES** Vosveld 9A | B-2110 Wijnegem | Belgium T (+32) (0)3 326 20 26 welcome@orfit.com



Ref. No. 31815 VERSION 8 LAST UPDATE: 21/03/2023 **REVISION DATE: 21/03/2025**